




Separate Drive Rotary Vane 55 cfm

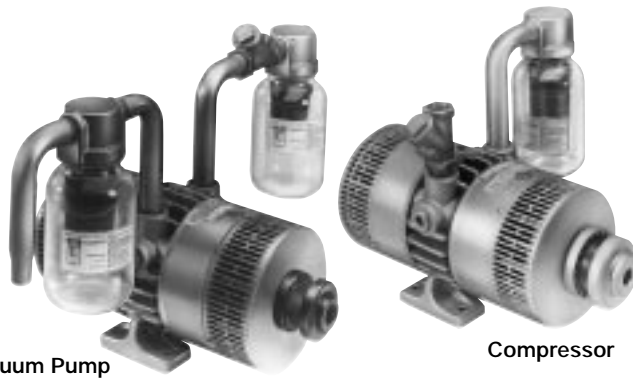

Vacuum Pump

Compressor

Oiless 6066 Series

MODEL 6066 SERIES

25" HG MAX. VAC., 55 CFM OPEN FLOW

15 PSI MAX. PRESSURE

PRODUCT FEATURES

- Oilless operation
- Rugged construction/low maintenance
- Essentially pulse-free service

INCLUDES

- Filter AD560
- Muffler AD560B
- Coupling AE544B-1 (.88" x 1.13") – Vacuum Pump
- Coupling AE765 (.88" x 1.13") – Compressor
- Check valve AH326B


RECOMMENDED ACCESSORIES

- Vacuum relief valve AE961
- Pressure relief valve AA307
- Vacuum gauge AA640
- Pressure gauge AA644B
- Coupling guard AH380B-1
- Base AB322E
- Repair kit K503


Product Dimensions (mm, inches)

Dimensions are for reference only.

Vacuum Pump

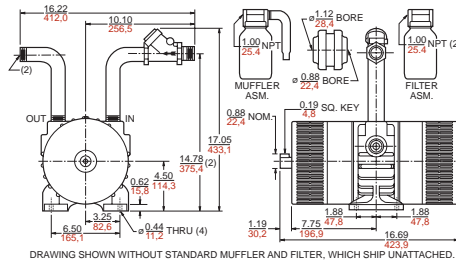

Compressor

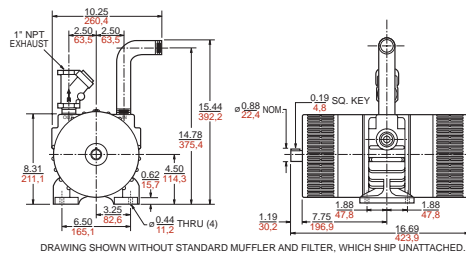

Product Specifications Note: "P" models are pressure, "V" models are vacuum.

Model Number	Motor	Base	Coupling Guard	RPM		HP	kW	Net Wt.	
				60 Hz	50 Hz			lbs.	kg
6066-P102	—	—	—	1725	—	5	3,73	88	39,6
6066-P104A	—	•	•	1725	—	5	3,73	123	55,4
6066-P106A-T339	230/460-60-3	•	•	1725	—	5	3,73	203	91,4
6066-P108-SD400-1*	415-50-3	•	•	—	1425	5	3,73	203	91,4
6066-V103	—	—	—	1725	—	5	3,73	92	41,4
6066-V105A	—	•	•	1725	—	5	3,73	114	51,3
6066-V107A-T339	230/460-60-3	•	•	1725	—	5	3,73	183	82,4
6066-V109-BC630-1*	415-50-3	•	•	—	1425	3	2,2	172	77,4

*Available only in Europe.

Product Performance (Metric, U.S.)

